



N-type i-TOPCon Monofacial Dual Glass MONOCRYSTALLINE MODULE

PRODUCT: TSM-XXXNEG9R.28

PRODUCT RANGE: 425-455W

455W

MAXIMUM POWER OUTPUT

0~+5W

BINNING TOLERANCE

22.8%

MAXIMUM EFFICIENCY

25 Years
PRODUCT WARRANTY

30 Years
POWER WARRANTY



Small in size, bigger on power

- Up to 455W, 22.8% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping, lower series resistance, improved current collection and enhanced reliability
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather with low temperature coefficient and operating temperature



Dual-glass Design, more secure and sustainable

- Upgraded dual glass of Vertex S, less prone to micro-cracks and scratches on the back during installation
- Fire class rating C



Ultra-low Degradation, longer warranty, higher output


- First-year degradation 1% and annual degradation at 0.4%
- Up to 25 years product warranty and 30 years power warranty



Universal solution for residential and C&I rooftops

- Easy for integration, designed for compatibility with existing mainstream inverters and diverse mounting systems
- Perfect size and low weight for handling and installation
- Most valuable solution on low load capacity rooftops (weight similar to backsheet version)
- Mechanical performance up to 5400 Pa positive load and 4000 Pa negative load

Trina Solar's Vertex Monofacial Dual Glass Performance Warranty

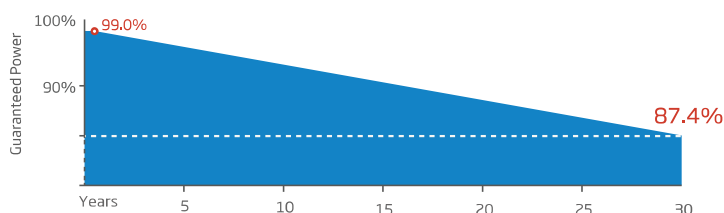


Comprehensive Products and System Certificates




IEC61215/IEC61730
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System


DIMENSIONS OF PV MODULE(mm)

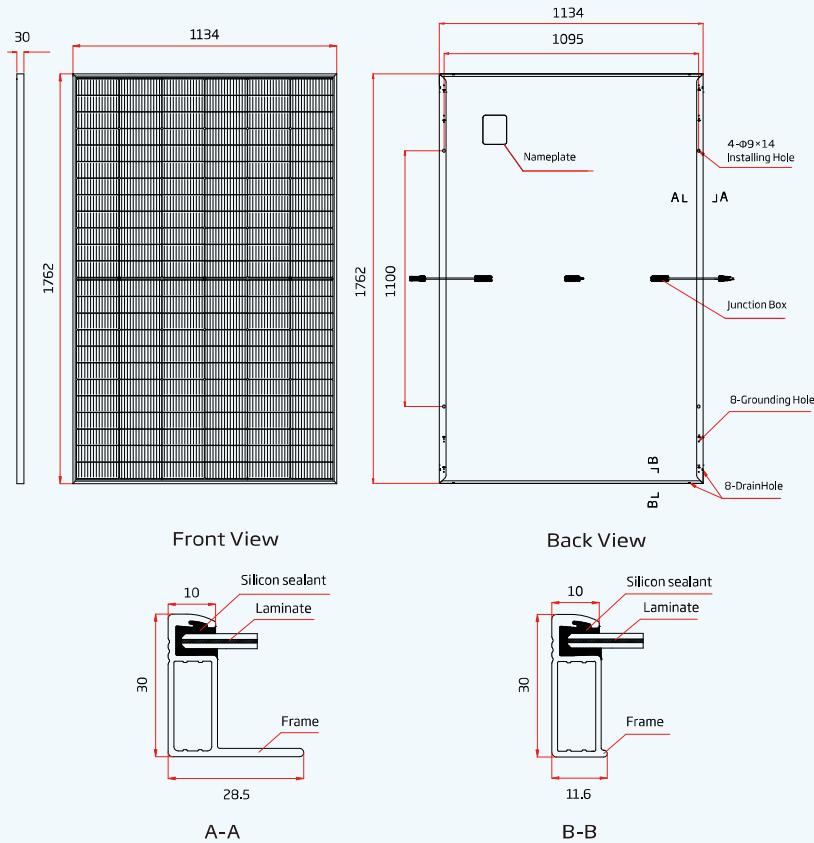

I-V CURVES OF PV MODULE(445W)

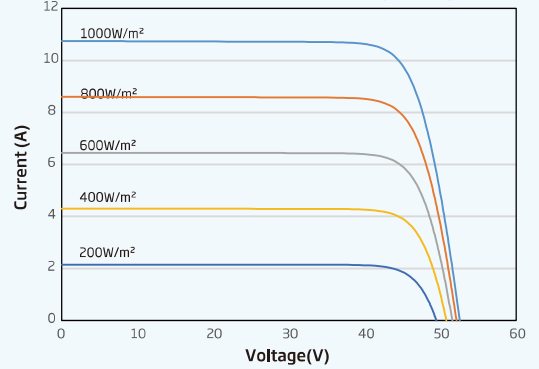

P-V CURVES OF PV MODULE(445W)

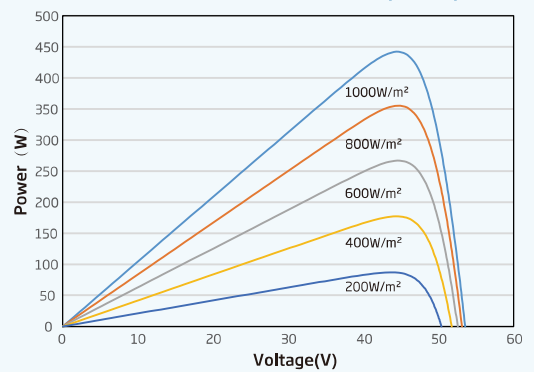

ELECTRICAL DATA (STC) TSM-XXXNEG9R.28 (XXX=425-455)

Peak Power Watts-P _{MAX} (Wp)*	425	430	435	440	445	450	455
Binning Tolerance-P _{MAX} (W)	0 ~ +5						
Maximum Power Voltage-V _{MPP} (V)	42.9	43.2	43.6	44.0	44.3	44.6	45.0
Maximum Power Current-I _{MPP} (A)	9.92	9.96	9.99	10.01	10.05	10.09	10.11
Open Circuit Voltage-V _{OC} (V)	50.9	51.4	51.8	52.2	52.6	52.9	53.4
Short Circuit Current-I _{SC} (A)	10.56	10.59	10.64	10.67	10.71	10.74	10.77
Module Efficiency η_m (%)	21.3	21.5	21.8	22.0	22.3	22.5	22.8

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Maximum Power-P _{MAX} (Wp)	325	329	332	336	339	343	348
Maximum Power Voltage-V _{MPP} (V)	40.1	40.7	41.0	41.4	41.7	42.0	42.3
Maximum Power Current-I _{MPP} (A)	8.09	8.08	8.12	8.14	8.17	8.19	8.22
Open Circuit Voltage-V _{OC} (V)	48.3	48.7	49.1	49.5	49.9	50.2	50.6
Short Circuit Current-I _{SC} (A)	8.51	8.54	8.58	8.60	8.63	8.66	8.68

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	N-type Monocrystalline
No. of cells	144 cells
Module Dimensions	1762×1134×30 mm (69.06×43.15×1.18 inches)
Weight	21.0kg (46.30 lb)
Front Glass	1.6 mm (0.06 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	POE/EVA
Back Glass	1.6mm(0.06 inches), Heat Strengthened Glass
Frame	30mm (1.18 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm² (0.006 inches²), Length: 1100mm/1100mm(43.3/43.3 inches)
Connector	Stabuli MC4 EV02

TEMPERATURE RATINGS

NOCT(Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P _{MAX}	-0.29%/°C
Temperature Coefficient of V _{OC}	-0.24%/°C
Temperature Coefficient of I _{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	25A

WARRANTY

25 year Product Workmanship Warranty**
30 year Power Warranty
1% first year degradation
0.4% Annual Power Attenuation

PACKAGING CONFIGURATION

Modules per box: 36 pieces
Modules per 40' container: 936 pieces

(**Please refer to Limited Warranty Supplement that applies to the TSM-***NEG9R.28,TSM-***NEG9RC.27.Products supplied after 1st Jan 2023 and installed within Australia & New Zealand rooftop market.)